


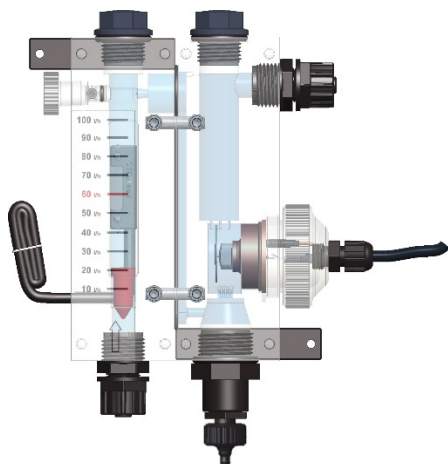

Code: 9900103049

CL

DESCRIPTION

Probe holder in PMMA plastic material, pressure resistant up to 5 bar at a working temperature of 60 °C, the modular probe holder that guarantees ultimate flexibility to add modules to meet individual application or installation needs.

The parts are designed and adapted to the range of available probes guaranteeing perfect chemical measurement in water treatment applications.

TECHNICAL FEATURES

Material	PMMA colourless
Sensor adapter	PG 13.5, 24 mm, 36 mm, 42 mm
Process connection	8 x 12 mm (tube)
Process temperature	0 – 60°C
Pressure range	0 – 5 bar
Flow rate	Range approx. 60 l/h

Probe Holder Flux, CLA (2) elements:

One (1) Flow meter
One (1) Amperometric Chlorine Probe Holder
Inlet 8x12 mm
Outlet 8x12 mm
Faucet Flow Regulation
Faucet for sample water
Reed Sensor (normally open)

DIMENSIONS

