



**Code: 9900101010**

### Main Features

- Cell constant:  $C=1,0 \text{ cm}^{-1}$  or  $K=1$
- Body material PVC 60°C
- Stainless Steel 316L Electrodes
- Mechanical Connection: 1/2 GAS Male PVC


### Field Application

- Wastewater
- Drinking Water
- Cooling Towers
- Irrigation

## TECHNICAL CHARACTERISTICS

Measurement range	0,5 ÷ 5.000 $\mu\text{S}$
Cell Constant [C-K]	$C=1 \text{ cm}^{-1}$ ; $K=1 \text{ cm}$
Temp. Range	60° C
Pressure Range	6 bar (*)
Body material	PP
Electrode material	AISI 316
Mounting Process	1/2" GAS Male
Cable	5 m

## DIMENSIONS

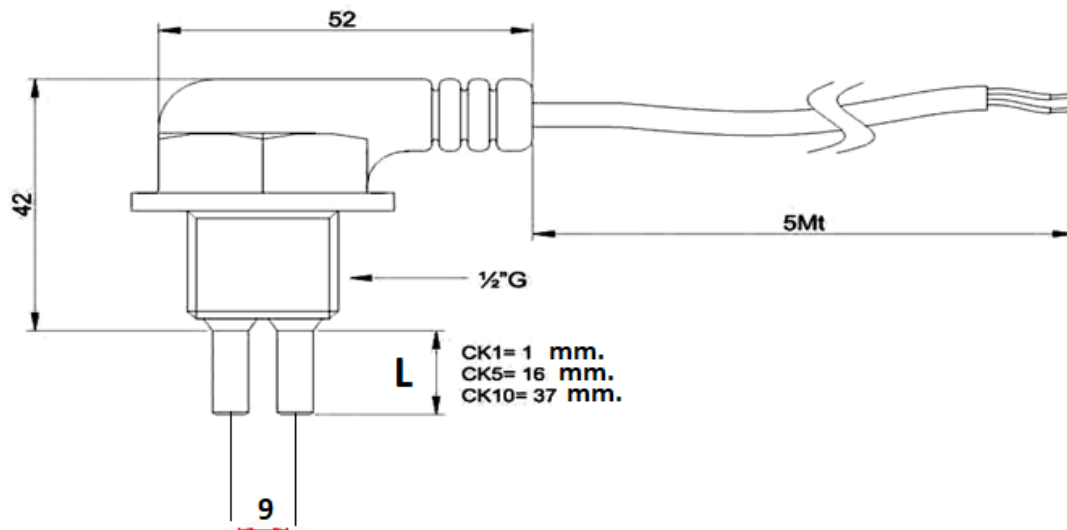

(\*) The maximum pressure of 6 bars is guaranteed at 25 °C. As the temperature increases, the pressure decreases linearly and at 50° or 80 °C, the maximum pressure is 1 bar.

Technical data can be changed without notice.  
9900101010\_CK-1-SS-PP\_R3